



AOX

AOXIANG
ELECTRIC INTELLIGENT ACTUATOR
ELECTRIC VALVES



AOX-FQ

Spring Return Electric Actuator

Patented products,
Counterfeiting not allowed


ZHEJIANG AOXIANG AUTO-CONTROL TECHNOLOGY CO.,LTD

Add: No.31 Hua'an Road, Nanbin Street, Rui'an City,
Zhejiang Province, China 325207
Tel: +86-577-65151268
Email: zjaox@zjaox.com
Http: //www.aoxactuator.com

AOX-FQ Electric Actuator

Patented products,
Counterfeiting not allowed

© 2024 aox technology copyright ♻ Ecology protection

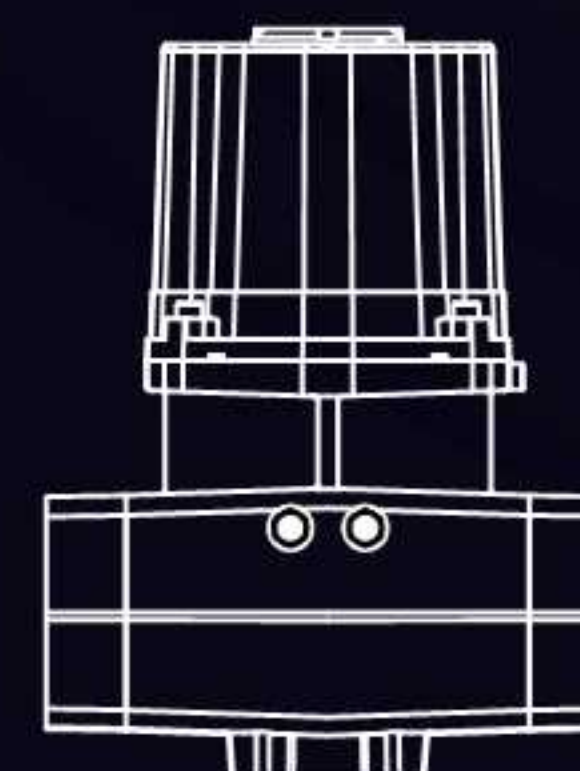




AOXIANG
ELECTRIC INTELLIGENT ACTUATOR
ELECTRIC VALVES

Catalogue

Company Profile	01
Application Case	02
Product Characteristics	03
Product Overview	05
Work Environment	06
Basic Control Mode	07
Control Function	07
Appearance Drawing	09
Outline Dimension Drawing	09
Product Parameters	10

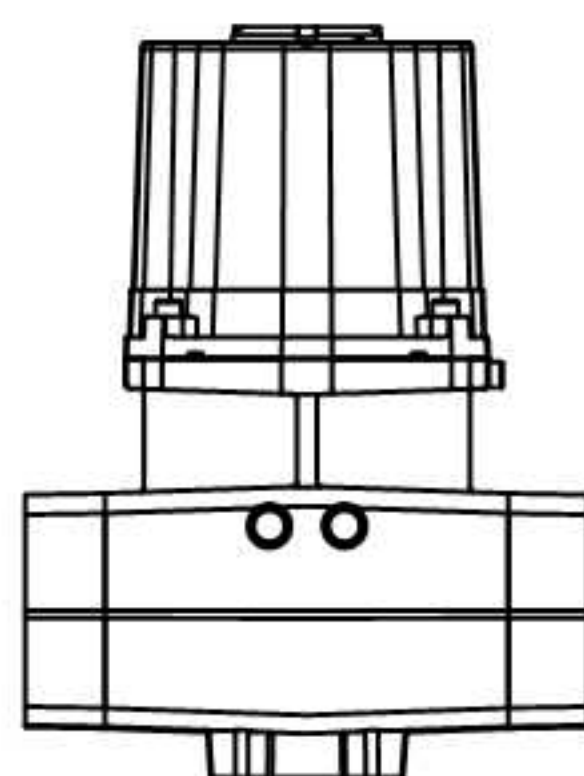

AOX-FQ Electric Actuator

Patented products,Counterfeiting not allowed.

AOX was founded in 1997. With decades of profound understanding of products and rich industrial application experience, rigorous manufacturing process and modular precision design, AOX provides the most professional automatic control products and solutions for various severe working conditions (such as military, nuclear and other fields). Whether in harsh environments or under various operating requirements specified by users, AOX actuators can not only meet high safety standards, but also prove the reliability and robust design of their products.

AOX has always focused on the modular design of products. The diversified components ensure that the products can be assembled according to customer needs, and provide various customized products to meet customer needs.

Field Case



Electric Power



Petroleum



Chemical industry



Water treatment



Food field




Metallurgy

Honors and qualifications

First tier supplier of CNPC
Sinopec Supplier
National Specialized and Innovative Small and Medium-sized Enterprises
National Intellectual Property Advantage Enterprise
National high-tech enterprises
National Technological Innovation Fund for Small and Medium sized Enterprises
National Torch Plan Industrialization Demonstration Project
Provincial High tech Enterprise Research and Development Center
Provincial science and technology new products
Provincial Science and Technology Progress Award
Provincial patent demonstration enterprise
AAA Credit Enterprise
WenZhou specialized, special and new key supporting enterprises
WenZhou Famous Brand Products
EU CE certification
DNVGL certification
CCS certification
ATEX certification
SIL3 certification
CCC certification
ISO9001 / ISO14001 / ISO45001

PRODUCT FEATURES

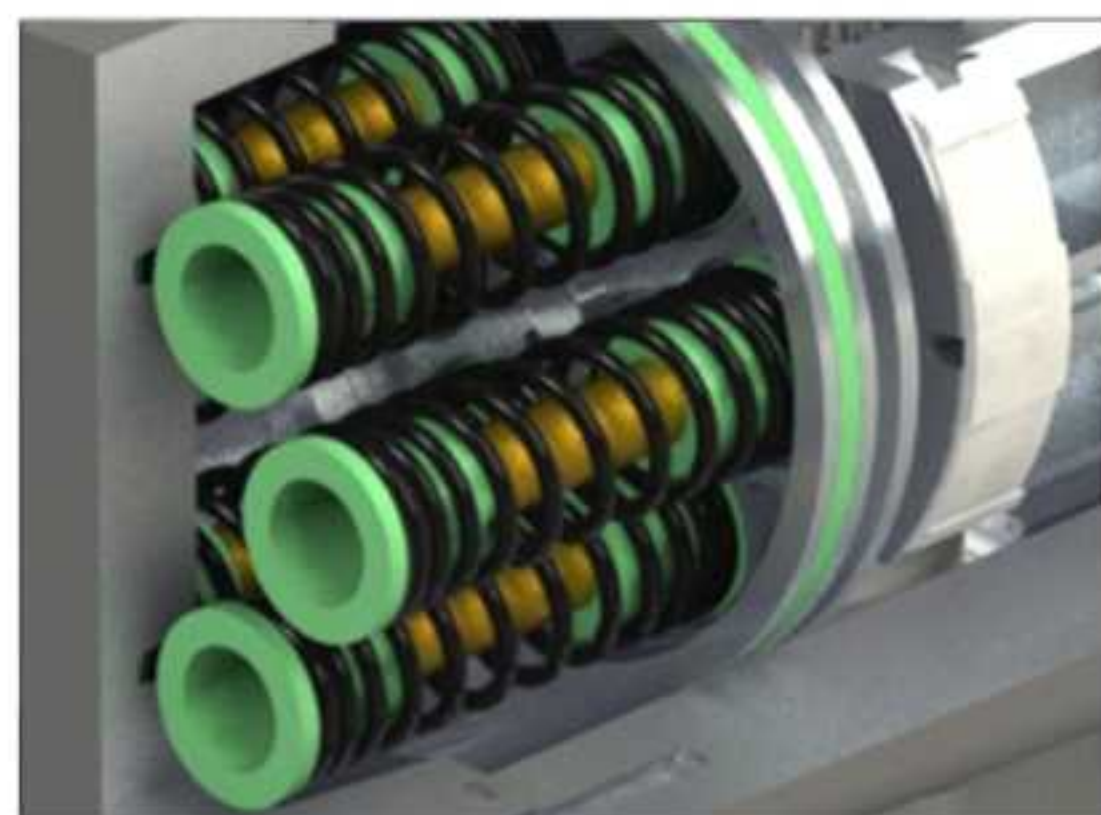

Operational safety

When it comes to safely opening or closing valves in emergency situations, this product offers the highest level of reliability with a mechanical solution. As required, the spring-return electric actuator generates the required torque through the energy storage mechanism and automatically retracts into place throughout the spring-return operation without any intervention.



Intelligent control section

Separate aluminum control unit, mounted on the main housing. Convenient for complete replacement and contains all module control components.



Terminal box

The terminal box with double sealing protection design also ensures the sealing integrity of the electrical parts inside the electric device when the terminal box cover is opened for field wiring.


AOX-FQ Electric Actuator

Patented products, Counterfeiting not allowed.




Window

The window is made of polycarbonate, with built-in O-ring and fixed metal gland. The gland comes with two drainage slots, which is not easy to accumulate water and has a magnifying effect for easy observation of valve position.

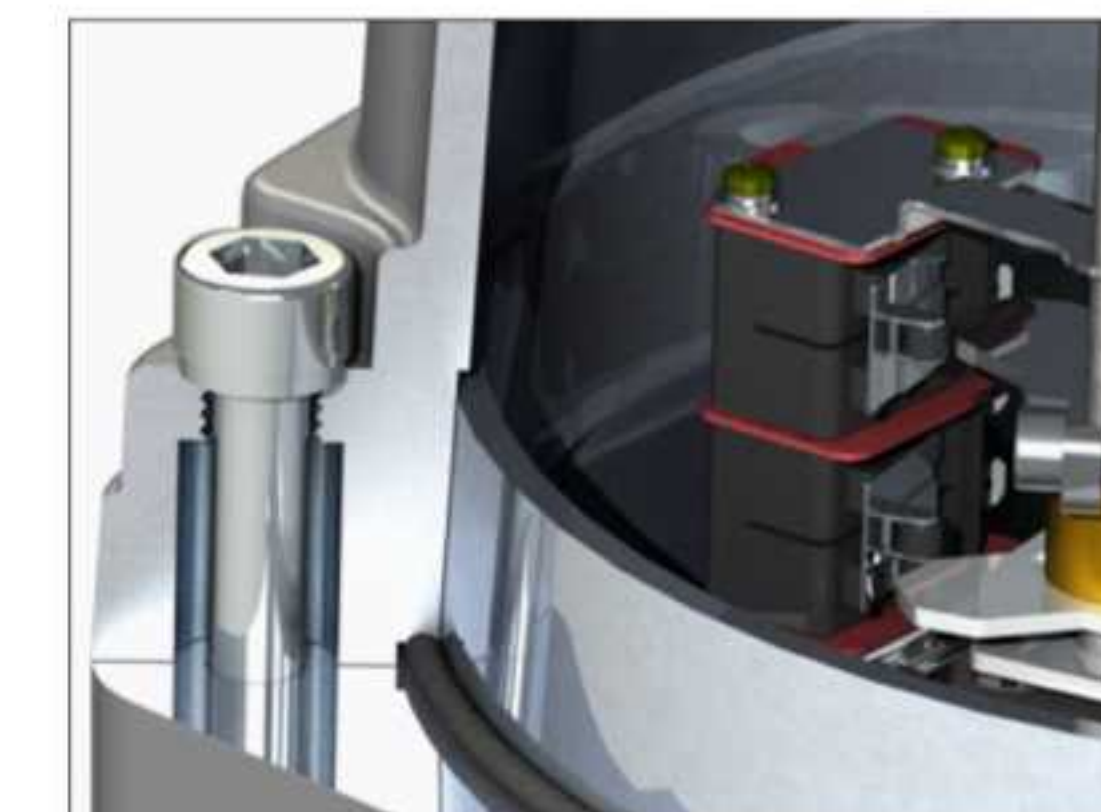

Upper cover and housing

Other actuators have a vertical joint between the upper cover and the housing, which makes it difficult to remove the upper cover due to the small tolerance here.

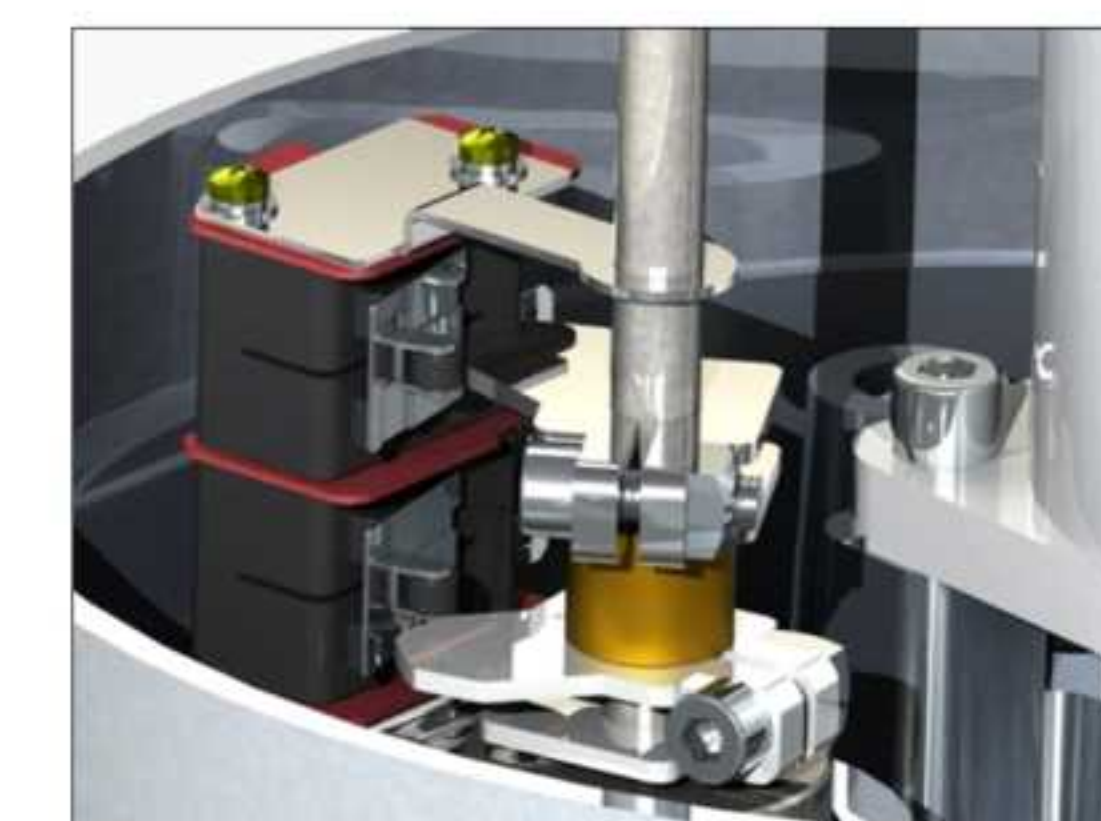

Cams and limit switches

Fastened by two screws on top, easy to set, each cam can be set individually, once set. Each cam stays in this position forever.

I SUMMARY

AOX-FQ series spring-return angular stroke electric actuator belongs to the mechanical energy storage class of actuators. Under normal power supply, the actuator is driven by the motor to turn on the equipment while the spring accumulates energy, and in case of emergency power failure of the system, the spring releases energy to drive the actuator and return the equipment and device to the safe position (fully open or fully closed). The reset speed is precisely controlled, and the reset process is safe and smooth, preventing pipeline and line explosions.

I Description

- Torque range:50~100Nm
- Explosion proof enclosure with Exd II CT5/Ex tD a21IP67T95 °C (ATEX type optional)
- Basic control mode:
 - ON-OFF MODEL
 - MODULATING MODEL
 - CONTINUOUS MODELING MODEL
- Different control types are available according to customer requirements:
 - ON-OFF TYPE
 - MODULATING TYPE (PCU)
 - NON-INTRUSIVE INTELLIGENT TYPE (SICU/SRCU)
 - INTELLIGENT TYPE (ICU)
 - FIELDBUS TYPE(ICU+SINGLE/DOUBLE CARD+ FIELDBUS NAME)

I Working environment

- Sealing protection ----- Conforms to GB/4208-2017 standard, IP67 (standard, all connection surfaces are set with O-ring seal) protection level, available Optional IP68 (double O-rings are set on all connecting surfaces).
- Explosion protection level ----- According to GB/3836, IEC, CU-TR standard, Exd design. ATEX, CCC certification, meet all potential in explosive environments (such as oil, gas, chemical, power, metallurgy and the emerging gas industry, etc.).
- Anti-corrosion protection ----- Is anodized and polyester powder coated, standard color is AOX grey (similar to RAL 7039), corrosion resistant Strong corrosion resistance, suitable for working conditions such as industrial corrosive environment (chemical, alumina plant) or marine corrosive environment (offshore/sea).
- Ambient temperature ----- Standard: ON-OFF TYPE, MODULATING TYPE (-30 °C - +75 °C)
INTELLIGENT TYPE, NON-INTRUSIVE INTELLIGENT TYPE (-25°C-+70°C)
Low temperature: ON-OFF TYPE, MODULATING TYPE (-60°C-+50°C)
INTELLIGENT TYPE, NON-INTRUSIVE INTELLIGENT TYPE (-40°C-+60°C)



I Basic Control Methods

According to EN 15714-2 standard, to meet different application conditions and designs, there are three basic control methods as follows

Type I On-Off type

The actuator drives the valve from fully open to fully closed or fully closed to fully open.

Type II Modulating Type

The actuator sometimes needs to drive the valve to any position (fully open, midway position and fully closed).

Type III Continuous Modulating Type

The actuator frequently drives the valve to any position between fully open and fully closed.

For continuously adjustable actuators, the number of starts allowed and the load conditions are additionally referenced to the characteristics.

The on-off type or modulating type is selected according to the different mechanical loads of the actuator. Therefore, each actuator type can be used in various operating modes.

	On-Off type	Modulating Type	Continuous Modulating Type
Working mode	S2-15min/30min	S2-15min/30min	S4-25%/50%
Applicable control functions	Model Name		
	Fieldbus type	ICU+Modbus/Profibus/Hart	Continuous Modulating Type
	intelligent type	ICU	Continuous Modulating Type
	Non intrusive intelligent type	SICU	/
	General Type	On-Off type	PCU
			Continuous Modulating Type

Note: the number "1" after the model represents the voltage AC 1ph; "2" stands for voltage AC 3ph; "3" represents voltage DC, such as SICU2 (AC 3ph non-invasive integrated switch type)

I Control Functions

AOX actuators can be integrated into any automation system and it is advisable to choose an actuator with more than non-intrusive integrated functions during the product selection phase, thus saving a lot of time in project planning, installation and documentation required to select external controls. AOX offers a wide range of control functions, so customers can choose the best solution for their needs.

Intelligent Type (ICU)

The ICU control system has comprehensive configuration capabilities for all actuator control functions and supports many different fieldbus controls.

LCD display

- ▶ Digital display of opening percentage, accurate to **0.1%**
- ▶ Valve position can still be displayed locally when the power is off (optional)
- ▶ Fault self-diagnosis function display, such as: **valve position error, torque overload, motor overheating**, etc.

Non-Intrusive commissioning

- ▶ Infrared remote control: convenient for remote operation and setting various functions
- ▶ Menu setting by field control knob or remote control

Electronic torque (Optional)

- ▶ Torque range adjustable, display running torque, percentage form display

Absolute encoder

- ▶ No battery support, high precision recording of valve position

ESD function

- ▶ In case of emergency, the ESD signal can override any on-site or remote signal (according to the parameter setting) to force the actuator to close or open the valve.

Fieldbus control (Optional)

- ▶ Many different fieldbus systems, such as Profibus, Modbus, Hart, etc



Non-Intrusive Intelligent Type (SICU/SRCU)

When the application requires adaptive control function, configurable user interface or intelligent diagnostic function requirements (SICU: non-invasive integrated on-off type, SRCU: non-invasive integrated type), the choice of non-invasive integrated function will be the perfect solution.

LCD display

- ▶ Chinese/English switch(optional), Digital display of opening percentage
- ▶ Valve position can still be displayed locally when the power is off(optional)
- ▶ Fault self-diagnosis function display, such as: **valve position error, torque overload, motor overheating**, etc.

Non-Intrusive commissioning

- ▶ Infrared remote control(Optional): convenient for remote operation and setting various functions
- ▶ Menu setting by field control knob or remote control

Electronic torque(Optional)

- ▶ Torque range adjustable, display running torque, percentage form display

Absolute encoder

- ▶ No battery support, high precision recording of valve position

Status indicator

- Full Open
- Full Close



Modulating Type (PCU)

Signal setting

- ▶ Input (setting) and output (feedback) signals are completely isolated.
- ▶ Input/Output: 4-20mA(standard) Input impedance 160Q
- ▶ Input/Output: 0-10V, 1-5V, 0-20mA, etc. (optional)

Analog output

- ▶ Current: Maximum acceptable load is 750Ω at 24VDC supply
- ▶ Voltage: Minimum acceptable load is 50KΩ (shunt resistance 500Ω)

Adjustment accuracy

- ▶ Factory standard accuracy 0.7%
- ▶ Accuracy **0.2%~0.5%** can be set



ON-OFF Type

Position indicator

- ▶ The visual position indicator provides a clear indication of the current valve position. The indicator is mechanically connected to the valve spindle.

Stroke, cam and limit switch

- ▶ Omron travel switches are used for good stability and long service life.
- ▶ Fastened by two screws on top, easy to set, each cam can be set individually, once set, each cam remains in this position forever.




In addition to the above functions, if you have other needs, please contact us.

Appearance Drawing



NO.	Spare Parts
1	Control Room
2	Electrical Interface
3	Window
4	Cover
5	Housing
6	Mechanical limit
7	Flange connection

Outline dimension drawing

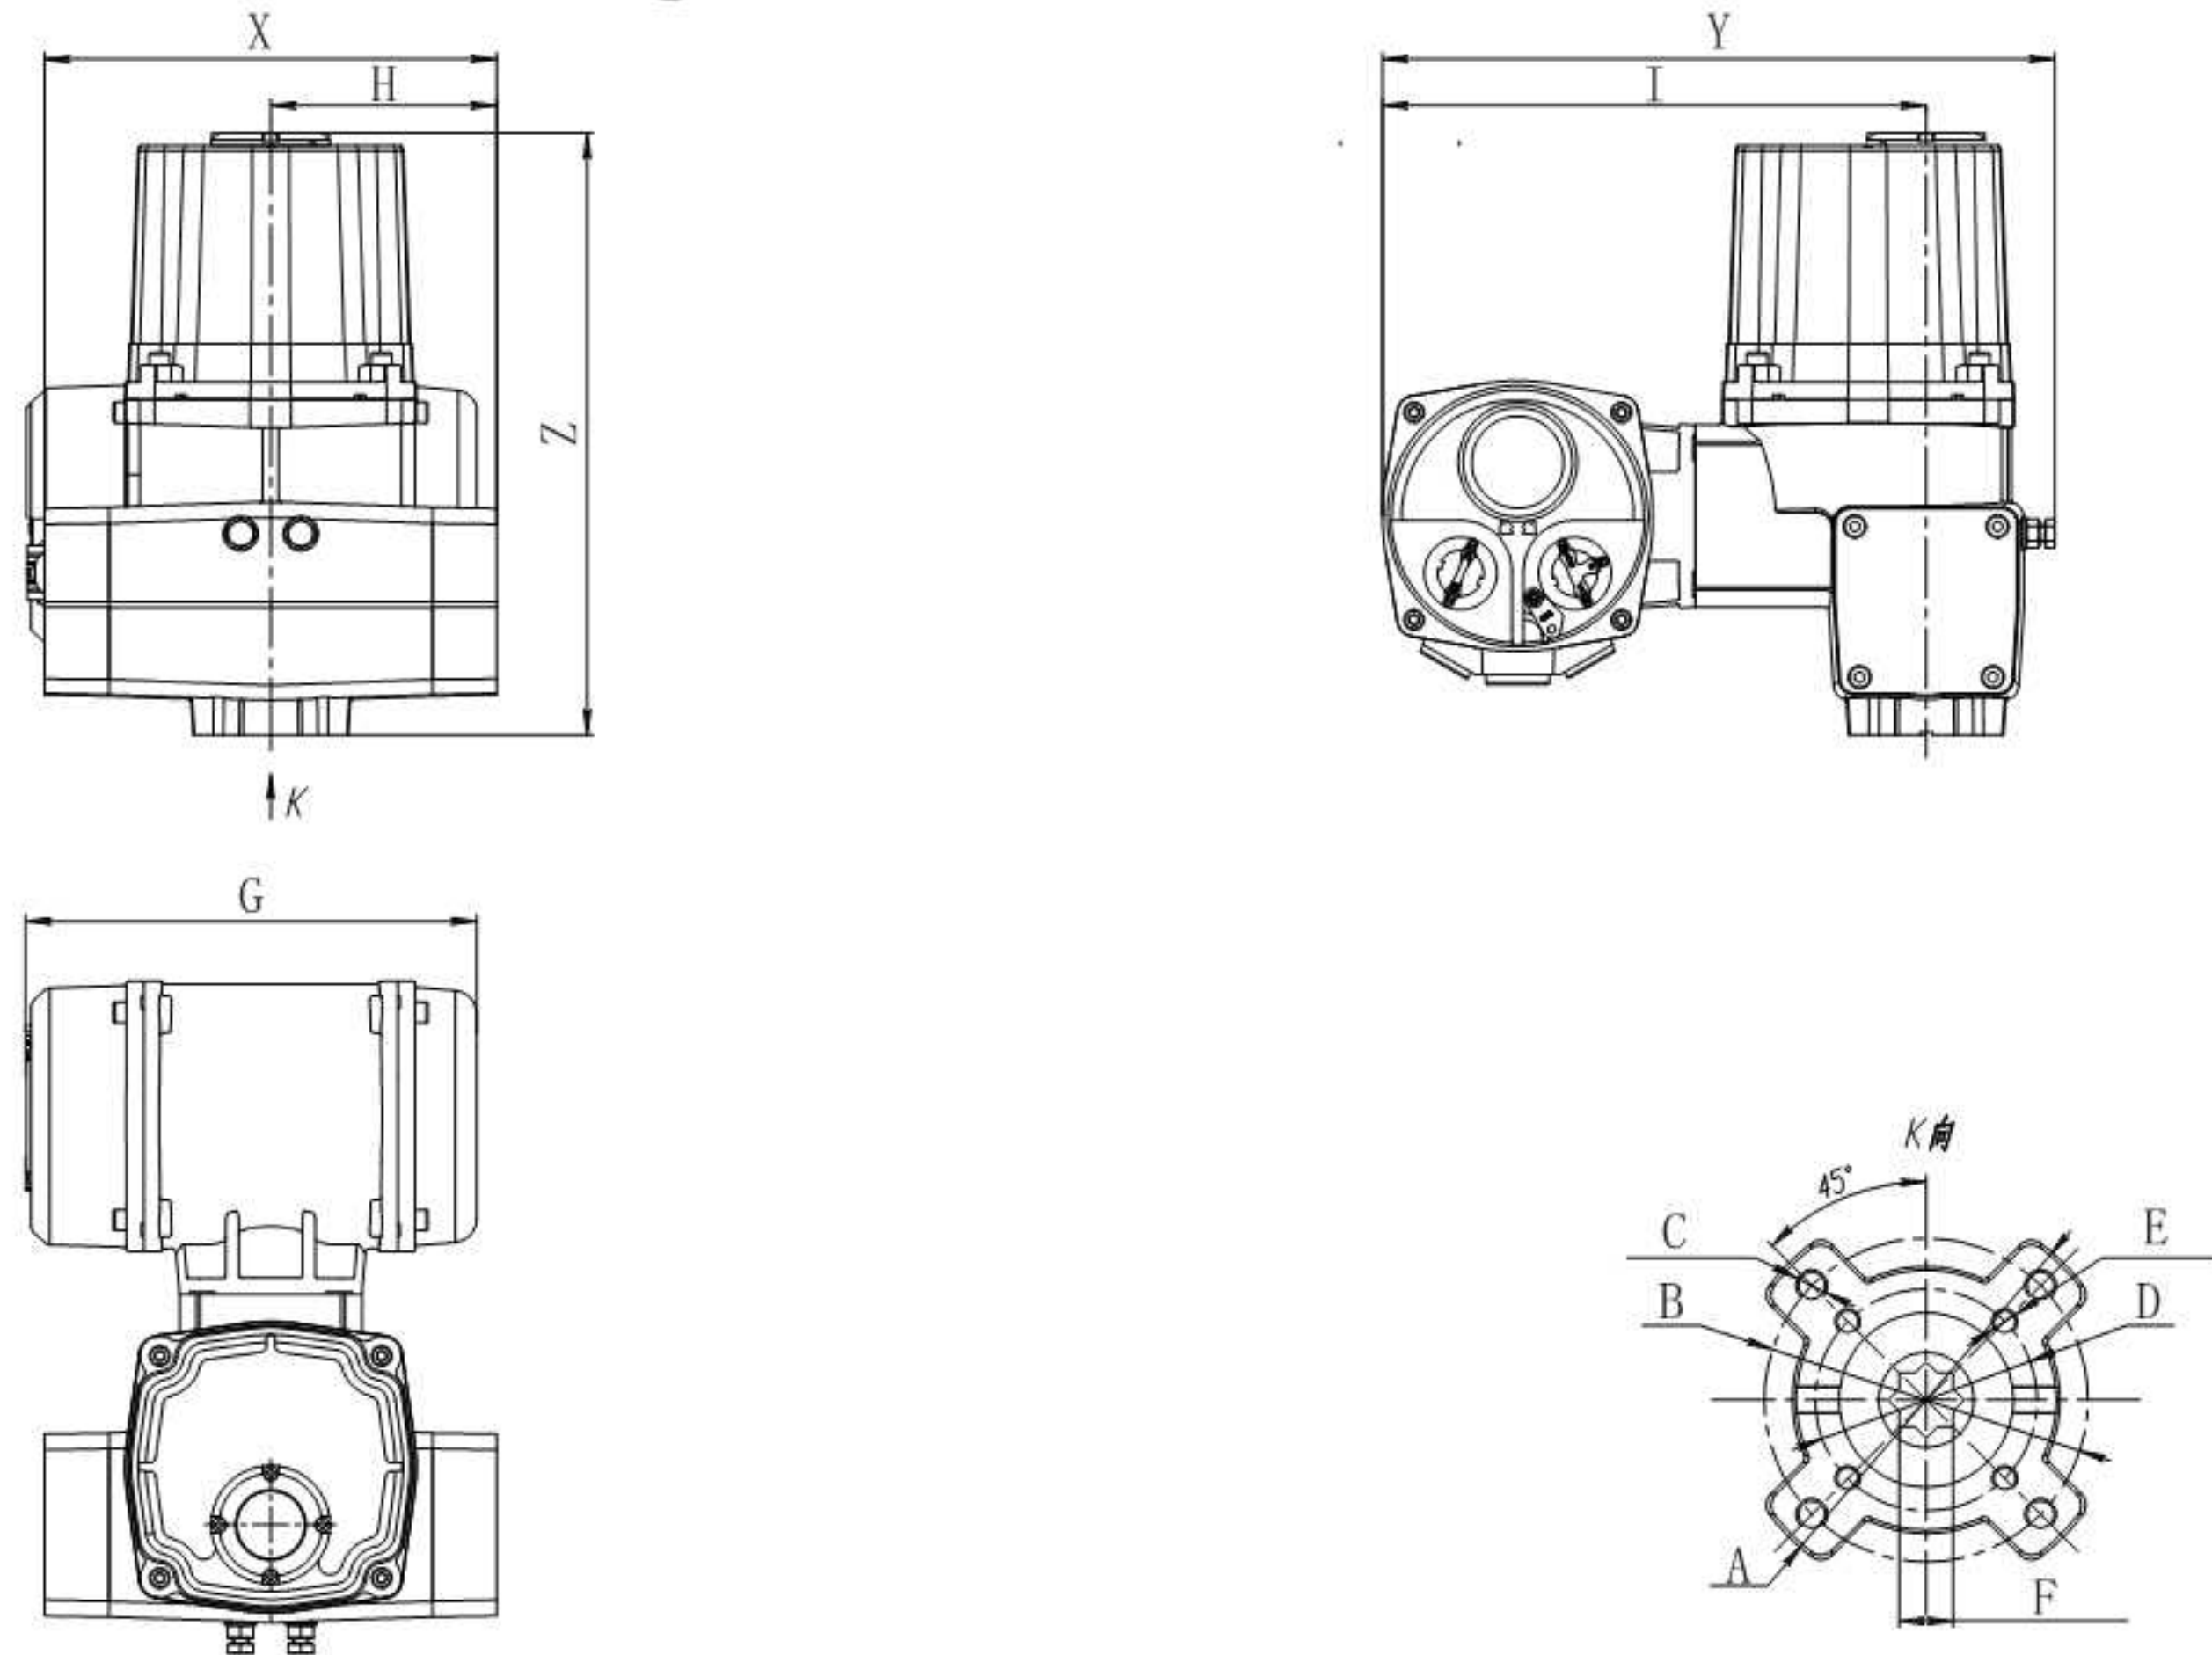

Unit:mm

Model	X	Y	Z	A	B	C	D	E	F	G	H	I
AOX-FQ-005	285	424	380	φ 120	φ 102	4-M10 ∇ 22	φ 70	4-M8 ∇ 17	17x17 ∇ 20	285	142.5	343
AOX-FQ-008	285	424	380	φ 120	φ 102	4-M10 ∇ 22	φ 70	4-M8 ∇ 17	17x17 ∇ 20	285	142.5	343
AOX-FQ-010	285	424	380	φ 120	φ 102	4-M10 ∇ 22	φ 70	4-M8 ∇ 17	17x17 ∇ 20	285	142.5	343
AOX-FQ-015	406	554	535	φ 140	φ 120	4-M10 ∇ 22	φ 102	4-M8 ∇ 17	27x27 ∇ 32.5	285	213.5	376
AOX-FQ-020	406	554	535	φ 140	φ 120	4-M10 ∇ 22	φ 102	4-M10 ∇ 22	27x27 ∇ 32.5	285	213.5	376
AOX-FQ-030	406	554	535	φ 140	φ 120	4-M10 ∇ 22	φ 102	4-M10 ∇ 22	27x27 ∇ 32.5	285	213.5	376

Product specifications

General specifications	
Torque range	50-300Nm
Shell material	Die cast aluminum
Position indicator	Even in case of power failure, the valve position dial can display continuous position changes
Tightness	
Corrosion protection	Paint system
	• Polyester powder coating conforms to GBT 18593-2001 standard
	• Optional protection for highly corrosive conditions
	• Screws are all stainless steel screws
Travel/limit	
Travel	90 ° standard (90 °~270 ° optional)
Power loss reset direction	Off, the opening direction can be set
Midway stop	Electromagnetic brake control
Limit mode	Electric control: electronic limit
	Power off reset: mechanical limit
Mechanical limit	2 external adjusting bolts
Mechanical specifications	
Self locking device	Electromagnetic brake control
Spring retraction life	100000times
Output flange	The bottom installation dimension shall conform to ISO5211 international standard
output shaft	The output shaft drive sleeve can be disassembled and machined for adaptability. Can be installed vertically or horizontally.
Seismic performance	X Y Z 10g,0.2~34 Hz,30mins
lubrication	Aluminum base grease (EP type)
Electrical specifications	
Motor power supply	110/220V AC 1Phase,380/440V AC 3Phase,50/60Hz, ±10%
Control power	110/220V AC 1Phase,50/60 Hz, ±10%
Electric machinery	Squirrel cage asynchronous motor, insulation class H
Failsafe/Operating Temperature	Built in thermal protection, open 120 °C± 5 °C/close 97 °C± 5 °C
Heater	330W(220V AC) Anti condensation
Cable entry	2×NPT 3/4", 1×NPT 1"
EC Directive	
Conformity with EC Directives	The actuator meets the following requirements
	• 2014/30/EU Electromagnetic Compatibility
	• 2014/35/EU Low Voltage
	The following harmonized standards:
	• General emission standard for industrial environment EN 61000-6-44
	• Rotating electrical machine standard EN 60034-1
	• General anti-interference standard for industrial environment EN 61000-6-4

Standard parameters

Model	Maximum output torque	Operating time (S/90°)		Motor (H)	Rated current (A)				Weight
					110V AC(50/60Hz)		220V AC(50/60Hz)		
	NM	Electric	Spring return	W	Function	Locking	Function	Locking	KG
AOX-FQ-005	50	10	< 3	20	0.94	0.1	0.49	0.1	21
AOX-FQ-008	80	10	< 3	20	0.96	0.1	0.50	0.1	21.5
AOX-FQ-010	100	10	< 3	20	0.97	0.2	0.51	0.2	22
AOX-FQ-015	150	20	< 3	40	1.51	0.2	0.29	0.2	51
AOX-FQ-020	200	20	< 3	40	1.68	0.3	0.30	0.3	51.5
AOX-FQ-030	300	20	< 3	40	1.82	0.3	0.32	0.3	52

The above time is the regular time of the actuator. If you need special time, please contact our company.